

Standard Equipment & Options

Standard Equipment	Optional Equipment
Folding ROPS Frame	Site Lights
Reversing Alarm	Road Lights (RTA)
Flashing Beacon	Rear View Mirror
Towing Bracket	Special Paint
	Kosran Immobiliser
	Data Tags
	CESAR
	Fixed ROPS

Dealer

Effective Date: 01 January 2009. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. © 2009 Terex Corporation. ♻️ Printed on material using 55% recycled fibre from both pre and post-consumer sources, together with 45% virgin ECF fibre from sustainable forests. DS TAS567 0209- EN

Terex United Kingdom Limited
 Central Boulevard, ProLogis Park, Coventry, England CV6 4BX
 Tel +44 (0) 2476 339400 Fax +44 (0) 2476 339500
 Email cov.enquiries@terex.com www.terex.co.uk

POWER TIP / POWER SWIVEL SITE DUMPERS



TA5	TA6	TA7
TA5S	TA6S	

Specification

Payload	5000 kg / 6000 kg / 7000 kg
Gross Engine Power	62.5 kW (84 hp)
Max Skip Capacity	2910 - 3850 Litres

Features

- Large heaped skip capacities.
- "Rental Tough" designs and fabrications to keep you working in the toughest of conditions.
- Thick steel skip base plate with reinforced box sections for high strength and longevity.
- Exceptional service access and ease of maintenance built into every machine.
- High ground clearance, low centre of gravity for superb stability and site accessibility.
- Powerful, reliable and economical Perkins engines.
- Power Tip (PT) for forwards tip applications. Power Swivel (PS) enables effective placement of load to either side - useful for trench filling or small sites.

Specifications

Performance					
	TA5	TA5S	TA6	TA6S	TA7
Payload (kg)	5000	5000	6000	6000	7000
Unladen Weight (kg)	3880	4000	4110	4270	4170
Skip Capacity - Water (ltr)	1620	1700	1950	1850	2100
- Struck (ltr)	2450	2300	2740	2750	3020
- Heaped (ltr)	3100	2910	3780	3520	3850
Engine	Perkins 1104D-44T				
- Gross Power - kW (hp)	62.5 (84hp) at 2200rpm				
- Capacity	4.4 litres (4400 cc)				
- Maximum Torque	353 Nm at 1400rpm				
Tyre Size	12.0x18x12ply		405/70-20-14PR		
Drive	4/4 Powershuttle - permanent 4WD				
Max Travel Speed - mph (kph)	15.5 (25.0)	15.5 (25.0)	16.8 (27.0.)	16.8 (27.0.)	16.8 (27.0.)
Gradeability	25 %	25 %	25 %	25 %	25 %
Fuel Tank Capacity	67 Litres	67 Litres	67 Litres	67 Litres	67 Litres
Hydraulic Tank Capacity	50 Litres	50 Litres	50 Litres	50 Litres	50 Litres

Hydraulic System (Gear Pump)

TA5 / TA5S / TA6 / TA6S / TA7	
Flow rate	60 l/min
Operating Pressure	172 bar

Braking System


TA5 / TA5S / TA6 / TA6S / TA7	
Working Brake	Foot brake - oil immersed discs on front/rear
Parking Brake	Over centre parking brake - dry disc (gearbox)

Electrical System

TA5 / TA5S / TA6 / TA6S / TA7	
Voltage	12 V
Battery	90 Ah
Alternator	95 A

Dimensions

B = Overall Width (not shown)

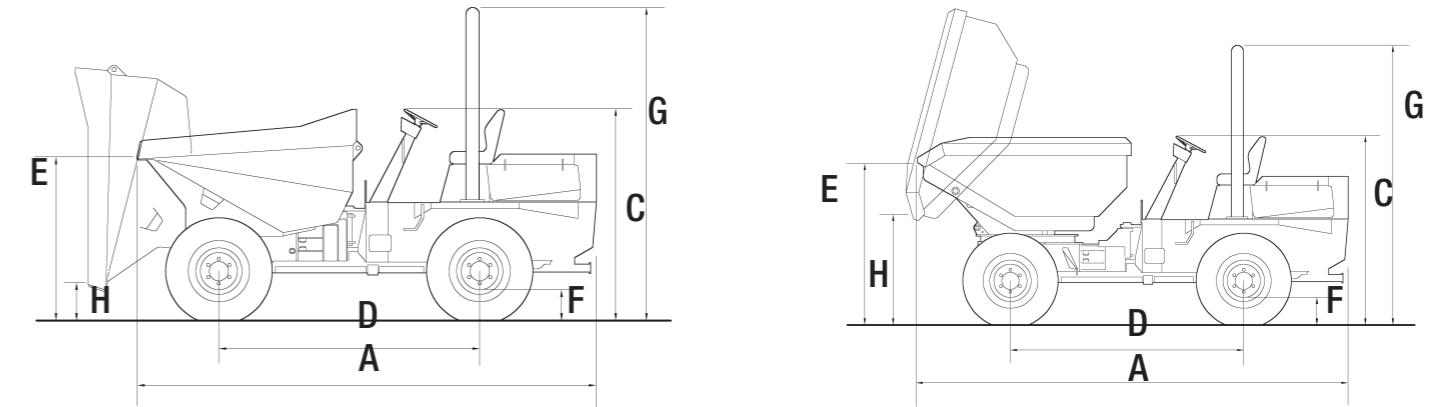

Dimensions (mm)

		TA5	TA5S	TA6	TA6S	TA7
A	Total Length	4270	4550	4320	4590	4320
B	Total Width (not shown)	2250	2075	2350	2095	2500
C	Height to Top of Steering Wheel	2070	2070	2160	2160	2160
D	Wheelbase	2450	2450	2450	2450	2450
E	Height to Front Lip of Skip (untipped)	1500	1690	1630	1760	1630
F	Ground Clearance	308	308	380	380	380
G	Height to Top of ROPS (raised)	2835	2835	2910	2910	2910
H	Height to Front Lip of Skip (tipped)	365	1060	360	1100	360
	Turning Radius to Outside of Skip	5400 mm	5400 mm	5600 mm	5600 mm	5600 mm
	Steering Angle	+/- 30°	+/- 30°	+/- 30°	+/- 30°	+/- 30°
	Oscillation	+/- 10.5°	+/- 10.5°	+/- 10.5°	+/- 10.5°	+/- 10.5°
	Tipping Type	Forward	Swing	Forward	Swing	Forward