


SINGLE DRUM VIBRATORY ROLLERS BW 219 DH-4I, BW 219 PDH-4I

PERFORMANCE DATA

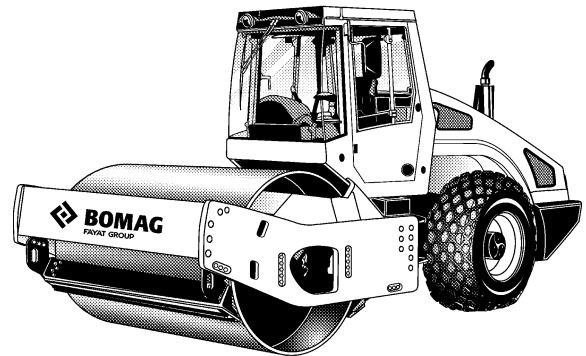


Machine type	Compaction output (m ³ /h)			
	Rock fill	Gravel, sand	Mixed soil	Silt, clay
BW 219 DH-4I	940-1880	700-1400	560-960	250-500
BW 219 PDH-4I	940-1880	700-1400	560-960	280-560

Machine type	Compacted layer thickness (m)			
	Rock fill	Gravel, sand	Mixed soil	Silt, clay
BW 219 DH-4I	1,60	1,20	0,80	0,35
BW 219 PDH-4I	1,60	1,20	0,80	0,40

Technical Data

Shipping dimensions in m3	without ROPS	with ROPS
BW 219 DH-4I	33,353	44,053
BW 219 PDH-4I	33,353	44,053

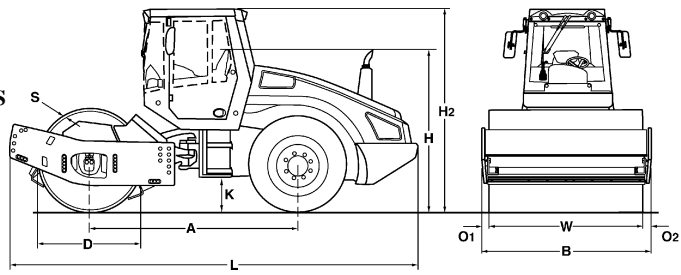

Standard Equipment

- BOMAG ECOMODE
- Anti Slip Control (ASC)
- Warning, information and operation displays with LCD
- Hydrostatic travel and vibration drive
- Hydrostatic articulated steering
- Articulated joint lock
- Rear axle with twin spring accumulator brakes
- No-Spin differential lock
- Warning horn
- Single lever control for travel and vibration
- Shock-mounted swivel seat, adjustable in height and length (Cabin)
- Contact scrapers (DH:Plastic)
- Scrapers (PDH:Steel)
- Emergency STOP
- Noise insulation
- Back-up warning system

Optional Equipment

- * ROPS/FOPS cabin with seat belts
- * Working lights front/rear
- ROPS with safety belt
- Radio (Bluetooth)
- Rotary beacon
- Indicator and hazard lights
- Contact scrapers (DH:Steel)
- BOMAG Evib-Meter (BEM)
- TERRAMETER BTMprof
- BCM05 Documentation system
- Special painting
- Environmentally compliant hydraulic oil
- Air condition
- Sun roof
- Slideable seat (DH)
- Padfoot segment kit
- Backup warning buzzer with broadband technology
- Rearview camera
- Protective ventilation system

* Standard delivery with CE conformity (valid within European Union)

Dimensions in mm

	A	B	D	H	H2	K	L	O1	O2	S	W
BW 219 DH-4I	3255	2300	1600	2288	3022	450	6338	85	85	40	2130
BW 219 PDH-4I	3255	2300	1500	2288	3022	450	6338	85	85	35	2130

Technical Data

Weights

	kg	BOMAG BW 219 DH-4I	BOMAG BW 219 PDH-4I
Grossweight	kg	20.930	19.900
Operating weight CECE w. ROPS-cabin	kg	19.200	19.650
Axle load, drum CECE	kg	12.900	13.350
Axle load, wheels CECE	kg	6.300	6.300
Static linear load CECE	kg/cm	60,6	

Dimensions

	mm	BOMAG BW 219 DH-4I	BOMAG BW 219 PDH-4I
Working width	mm	2.130	2.130
Track radius, inner	mm	3.890	3.890

Driving Characteristics

	km/h	BOMAG BW 219 DH-4I	BOMAG BW 219 PDH-4I
Speed	km/h	0- 13,0	0- 13,0
Max. gradeability without/with vibr.	%	58/55	60/58

Drive

	BOMAG BW 219 DH-4I	BOMAG BW 219 PDH-4I
Engine manufacturer	Deutz	Deutz
Type	TCD 6.1 L6	TCD 6.1 L6
Emission stage	3b/4i	3b/4i
Cooling	Liquid	Liquid
Number of cylinders	6	6
Performance ISO 3046	150,0 kW	150,0 kW
Performance SAE J 1995	201,0 hp	201,0 hp
Speed	2.200 min-1	2.200 min-1
Fuel	diesel	diesel
Electric equipment	V 12	V 12
Drive system	hydrost. standard	hydrost. standard

Drums and Tyres

	BOMAG BW 219 DH-4I	BOMAG BW 219 PDH-4I
Number of pad feet		150
Area of one pad foot	cm2	137
Height of pad feet	mm	100
Tyre size	23.1-26/12PR	23.1-26/12PR

Brakes

	BOMAG BW 219 DH-4I	BOMAG BW 219 PDH-4I
Service brake	hydrost.	hydrost.
Parking brake	hydromec.	hydromec.

Steering

	BOMAG BW 219 DH-4I	BOMAG BW 219 PDH-4I
Steering system	oscil.artic.	oscil.artic.
Steering method	hydrost.	hydrost.
Steering / oscillating angle +/-	grad 35/12	grad 35/12

Exciter system

	BOMAG BW 219 DH-4I	BOMAG BW 219 PDH-4I
Drive system	hydrost.	hydrost.
Frequency (1)	Hz 26	Hz 26
Frequency (2)	Hz 31	Hz 31
Amplitude	mm 2,10/1,20	mm 1,90/1,00
Centrifugal force	kN 326/240	kN 326/240
Centrifugal force	t 33,3/24,5	t 33,3/24,5

Capacities

	l	BOMAG BW 219 DH-4I	BOMAG BW 219 PDH-4I
Fuel	l	340,0	340,0

Technical modifications reserved. Machines may be shown with options.

